


MULTIMAX US

POWERED BY INNOVATION



MULTIMAX US

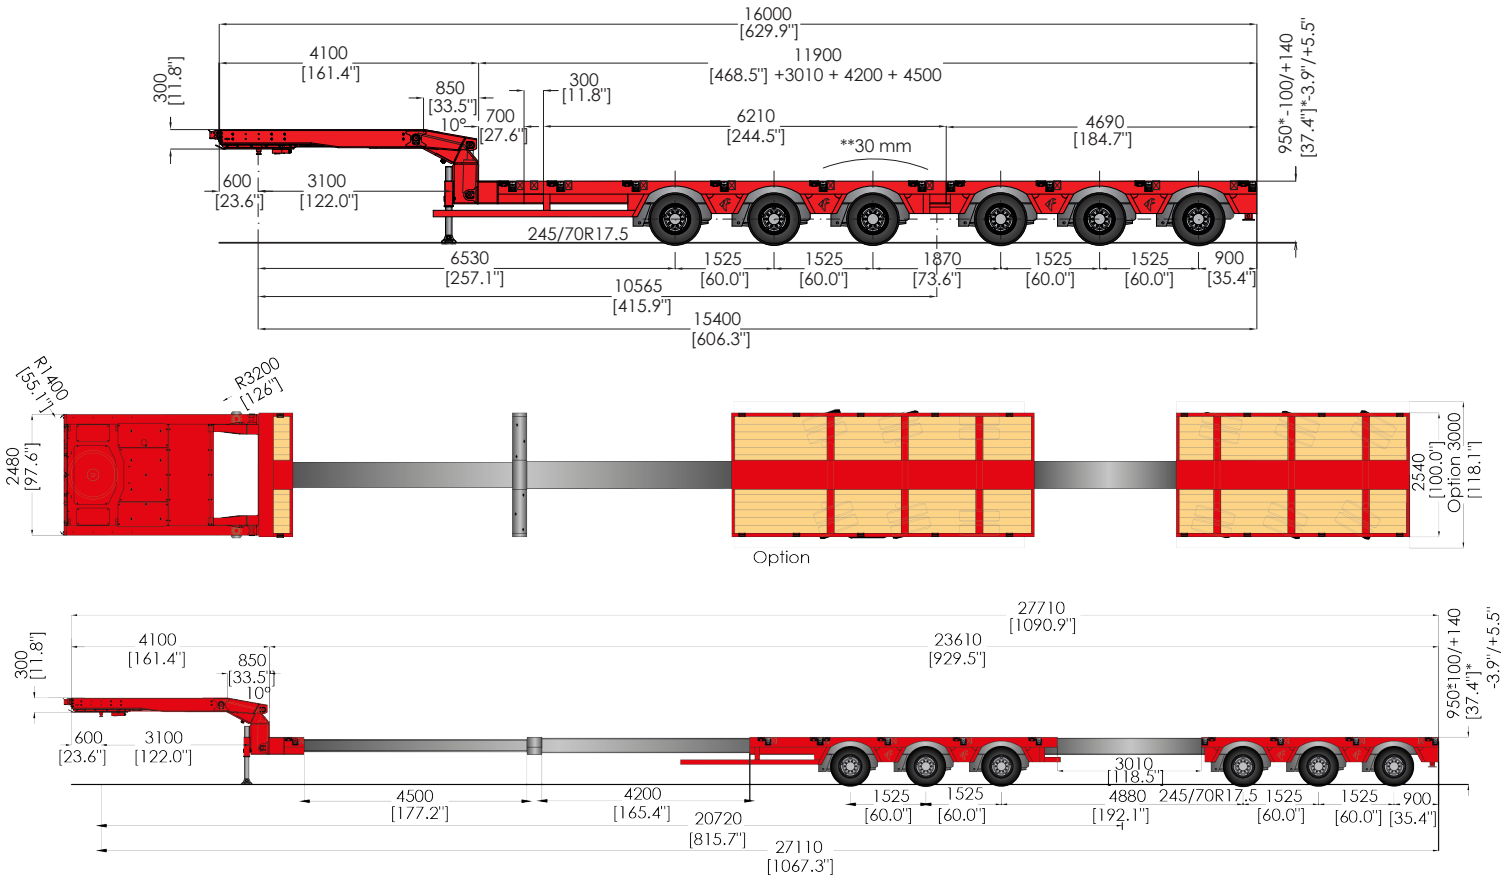

Multi-NZ-6(3+3)L-W-AA-26/32AT-12.00-17.5-2.54-US

- ➕ Front bogie with caster steered axles able to work in counter-steering
- ➕ Rear bogie fully king-pin steered
- ➕ Optimal load transfer via air ride
- ➕ Hydraulic lifting and lowering of the neck for best ground clearance
- ➕ Flexible spacing between axle tridems – 14'1" or 16'1"
- ➕ Complete trailer closed within 53'
- ➕ Stretches up to 77' in the well (+13' gooseneck)
- ➕ 37" of loading height
- ➕ Closed loading platform for versatile usage
- ➕ Lowest dead weight for maximum payload
- ➕ Simple-to-use and robust technology for quick and easy handling
- ➕ Rail at trailer rear for removable ramps